



Long Life Reliability
does not cost the earth

**Channel
Electric**



LPA USB Charging Unit and Socket

AC supply 3 pin with USB-A and USB-C

www.lpa-group.com

enquiries@lpa-channel.com

+44 (0) 1635 864 866



Brushed stainless steel finish

Rugged USB sockets

Rail compliant

Works with all major phone and tablet brands

TECHNICAL SPECIFICATION

230VAC nominal

EN 501212-3-2 (2016) + A1 : 2019 - EMC

EN 61373 - Shock & Vibration

BS6853 / EN 45545 - Based on minimal material use

EN 62368-1 & EN 62680-1-1

BS1363

RoHS and REACH compliant

Temperature range (operating) -20°C to + 55°C

USB Port A = 10,000 minimum operations

USB Port C = 10,000 minimum operations

3 Pin port = 15,000 minimum operations

PRODUCT CODE


CE160052

WEIGHT

Overall weight: 124.8g

Plastic weight: 34.8g

DIMENSIONS

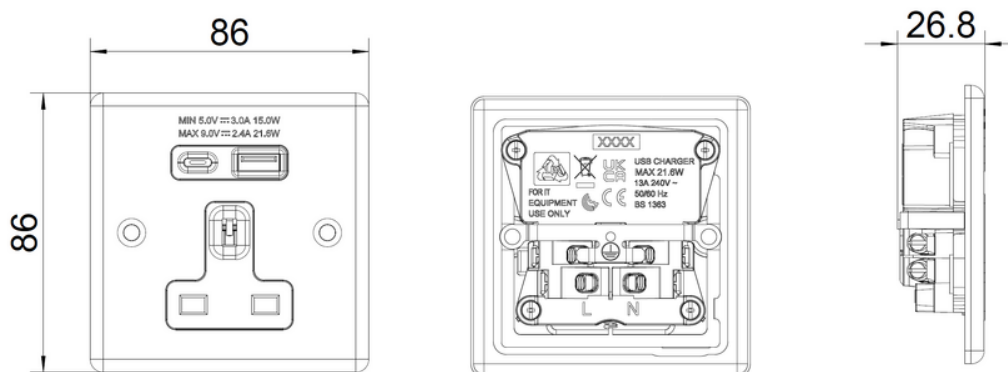

All dimensions in mm

LPA Channel Electric makes every effort to ensure the accuracy of the information contained within this datasheet. **However** we reserve the right to **withdraw** and re-issue this datasheet at a later date.



LPA Channel Electric
enquiries@lpa-channel.com
+44 (0) 1635 864 866
www.lpa-group.com

Bath Rd
Thatcham
Berkshire
RG18 3ST