



DC/DC converter for railway applications



Description

The 15W MBR series consists of low-power encapsulated converters which incorporate full surge and transient protection to RIA 12 and EN 50155. They are available in single, dual, and triple output versions, with nominal inputs from 24V up to 110V. Normally supplied with pins for PCB mounting, they are also available with flying leads for bulkhead mounting

Special features include:

- Fully protected to rail norms
- Rugged encapsulated construction
- Up to three outputs

Input specifications

The following input voltage versions are available as standard:

110V	(66.0 - 137.5V)	dc	(Suffix A)
72V	(43.2 - 90.0V)	dc	(Suffix D)
52V	(31.2 - 65.0V)	dc	(Suffix C)
36V	(21.0 - 50.4V)	dc	(Suffix F)
24V	(16.8 - 33.6V)	dc	(Suffix B)

Parameter	Detail
Input Ripple	To RIA 13 and EN 50155
Input Protection	Reverse polarity protection. Surges and transients to RIA 12 & EN 50155
Inrush Current	Limited to typically 5 x nominal current (after 0.1ms)
Efficiency	75% typical
Hold-up time	10ms to EN 50155 Class S2

Output specifications

Parameter	Detail
Maximum Output Power	Up to 15W
Output Versions	Single, Dual and Triple
Output Voltage	Can be specified from 5V to 48V
Setting Tolerance	±1.0% at 50% load, 15°C to 25°C
Minimum Load	Typically zero for all outputs, although in some cases a minimum load of up to 5% on U1 for full performance
Line Regulation	±0.2%
Load Regulation	±0.5%
Temperature Coefficient	<0.02% / °C
Output Ripple	<1% Pk-Pk of Output Voltage

Output specifications (Continued)

Parameter	Detail
Output Noise	<50mV Pk-Pk superimposed (up to 20MHz)
Response Time	1.0ms to within 2% (for a 20% - 90% load change)
Output Protection	All outputs protected against indirect transients to RIA 12
Current Limit	Operates at approximately 120% of full power. Auto recovery
Isolation (tested at dc equivalent voltage)	Input to Output 1.0kV ac Output to Output 500V ac


Environmental details

Parameter	Detail
Operating Temperature	-25°C to +65°C (no derating)
Storage Temperature	-40°C to +85°C
Cooling	Convection
Relative Humidity	99% max
Shock & Vibration	EN 50155 (EN 61373)
Environmental Protection	IP65

Applicable norms

Parameter	Detail
EMC	RIA 12, EN 50155 (2007), EN 50121-3-2 (2006)
Other	EN 50155 (2007), EN 45545-2 (2013)

Technical drawing

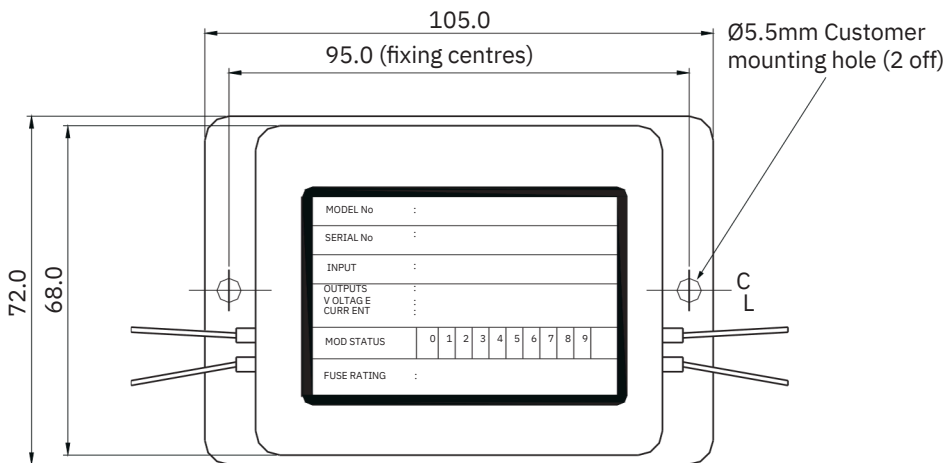

Notes:

All dimensions in mm.

Case: Moulded in ABS

Flame retardant to UL94 V-0

All leadouts are 0.6mm² (19/0.2mm) halogen free cable (Martek Power p/n 361072)

Length from outside of the potted box is 350mm ±10mm unterminated.


Cable marker code (as per label):

A: -Ve IN

B: +Ve IN

C: -Ve OUT

D: +Ve OUT

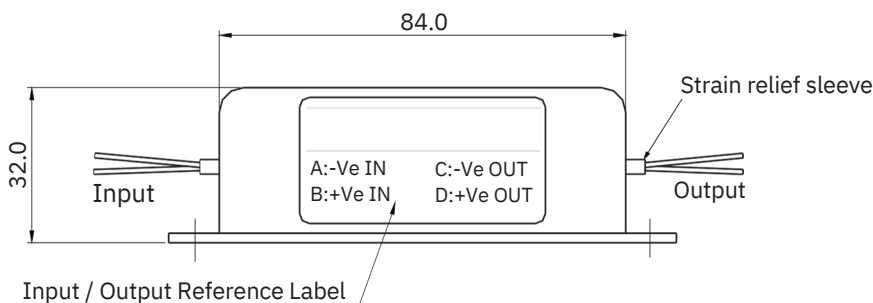

LPA Channel Electric

Glebe Farm Technical Campus
Knapwell, Cambridge
CB23 4GG, UK
+44 (0)1954 267726
powersystems@lpa-group.com

LPA Group 2025 | 05/2025/V2

LPA Group plc

Light & Power House,
Shire Hill, Saffron Walden,
CB11 3AQ, UK
+44 (0) 1799 512800
enquiries@lpa-group.com